


TL5602 8-BIT DIGITAL-TO-ANALOG CONVERTER

SLAS020 – SEPTEMBER 1988 – REVISED OCTOBER 1990

- 8-Bit Resolution
- $\pm 0.2\%$ Linearity
- Maximum Conversion Rate . . . 30 MHz Typ
20 MHz Min
- Analog Output Voltage Range
 V_{CC} to $V_{CC} - 1$ V
- TTL Digital Input Voltage
- 5-V Single-Supply Operation
- Low Power Consumption . . . 250 mW Typ
- Interchangeable With Fujitsu MB40778

N PACKAGE
(TOP VIEW)

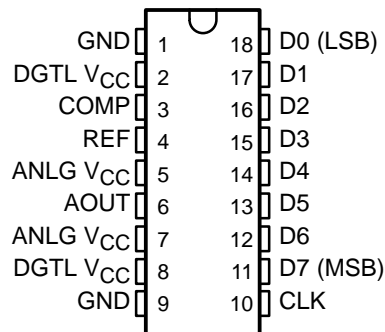


description

The TL5602 is a low-power ultra-high-speed video digital-to-analog converter that uses the Advanced Low-Power Schottky (ALS) process. It converts digital signals to analog signals at a sampling rate of dc to 20 MHz. Because of such high-speed capability, the TL5602 is suitable for digital video applications such as digital television, video processing with a computer, and radar signal processing.

The TL5602C is characterized for operation from 0°C to 70°C.

functional block diagram

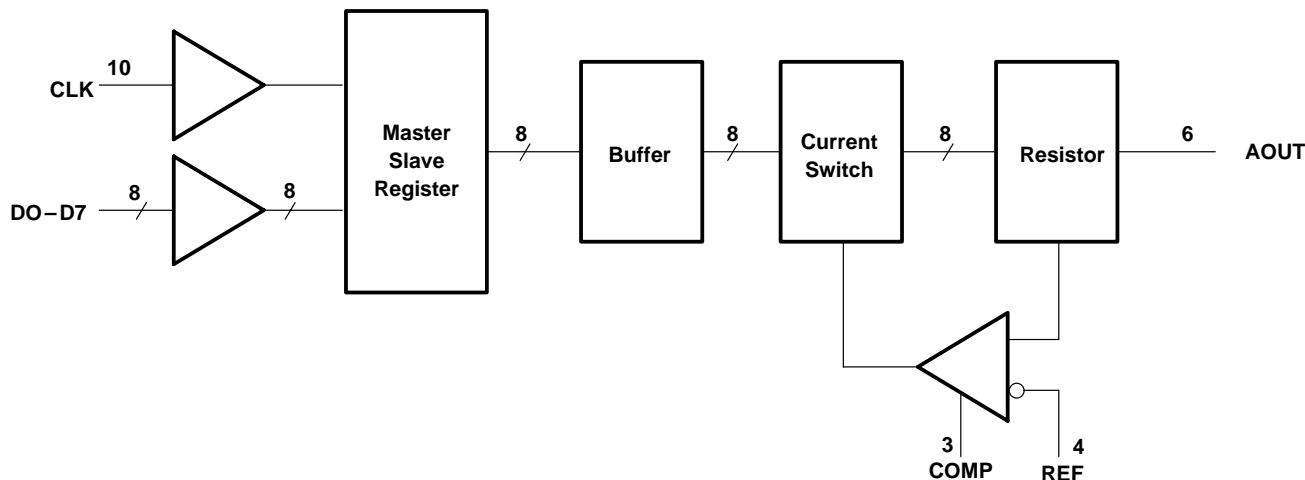

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265
POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443

Copyright © 1990, Texas Instruments Incorporated

TL5602 8-BIT DIGITAL-TO-ANALOG CONVERTER


SLAS020 – SEPTEMBER 1988 – REVISED OCTOBER 1990

FUNCTION TABLE

STEP	DIGITAL INPUTS								OUTPUT VOLTAGE†
	D7	D6	D5	D4	D3	D2	D1	D0	
0	L	L	L	L	L	L	L	L	3.980 V
1	L	L	L	L	L	L	L	L	3.984 V
127	L	H	H	H	H	H	H	H	4.488 V
128	H	L	L	L	L	L	L	L	4.492 V
129	H	L	L	L	L	L	L	H	4.496 V
254	H	H	H	H	H	H	H	L	4.996 V
255	H	H	H	H	H	H	H	H	5.000 V

† For $V_{CC} = 5\text{ V}$, $V_{ref} = 3.976\text{ V}$

schematics of equivalent input and output circuits

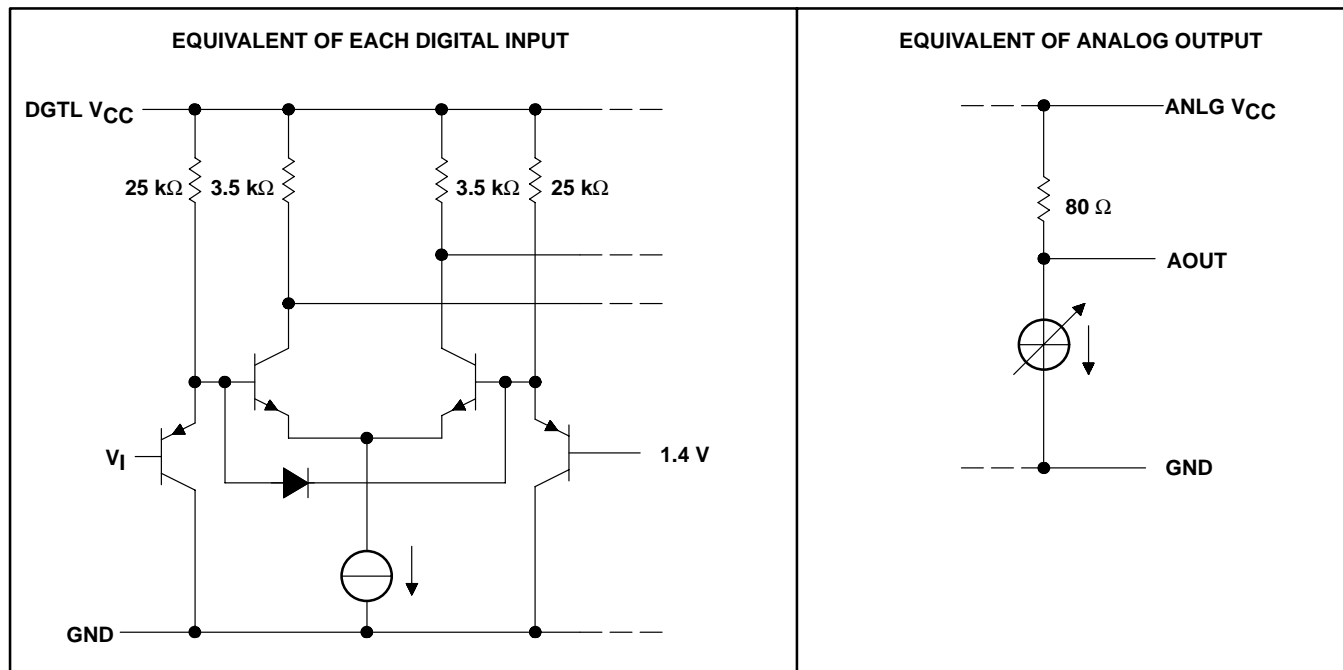

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage range, ANLG V_{CC} , DGTL V_{CC}	-0.5 V to 7 V
Digital input voltage range, V_I	-0.5 V to 7 V
Analog reference voltage range, V_{ref}	3.8 V to $V_{CC} + 0.5\text{ V}$
Operating free-air temperature range	0°C to 70°C
Storage temperature range	-55°C to 150°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	260°C



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265
POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443

TL5602

8-BIT DIGITAL-TO-ANALOG CONVERTER

SLAS020 – SEPTEMBER 1988 – REVISED OCTOBER 1990

recommended operating conditions

	MIN	NOM	MAX	UNIT
Supply voltage, V_{CC}	4.75	5	5.25	V
Analog reference voltage, V_{ref} (see Note 1)	3.8	4	4.2	V
High-level input voltage, V_{IH}	2			V
Low-level input voltage, V_{IL}			0.8	V
Pulse duration, CLK high or low, t_w	25			ns
Setup time, data before CLK \uparrow , t_{su}	12.5			ns
Hold time, data after CLK \downarrow , t_h	12.5			ns
Phase compensation capacitance, C_{comp} (see Note 2)	1			μ F
Operating free-air temperature, T_A	0		70	$^{\circ}$ C

- NOTES: 1. $V_{CC} - V_{ref} \leq 1.2$ V
 2. This capacitor should be connected between COMP and GND.

electrical characteristics over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP \dagger	MAX	UNIT
I_I	Input current at maximum input voltage	$V_{CC} = 5.25$ V, $V_I = 7$ V		0	100	μ A
I_{IH}	High-level input current	$V_{CC} = 5.25$ V, $V_I = 2.7$ V		0	20	μ A
I_{IL}	Low-level input current	$V_{CC} = 5.25$ V, $V_I = 0.4$ V		-40	-400	μ A
I_{ref}	Input reference current	$V_{Iref} = 4$ V			10	μ A
V_{FS}	Full-scale analog output voltage	$V_{CC} = 5$ V, $V_{ref} = 3.976$ V,	$V_{CC}-15$	V_{CC}	$V_{CC}+15$	mV
V_{ZS}	Zero-scale analog output voltage	$I_O = 0$ (no load)	3.919	3.980	4.042	
z_o	Output impedance	$T_A = 25^{\circ}$ C	70	80	90	Ω
I_{CC}	Supply current	$V_{ref} = 4.05$ V		50	75	mA

\dagger All typical values are at $V_{CC} = 5$ V, $V_{ref} = 4$ V, $T_A = 25^{\circ}$ C.

operating characteristics over recommended ranges of supply voltage and operating free-air temperature

PARAMETER		TEST CONDITIONS	MIN	TYP \dagger	MAX	UNIT
E_L	Linearity error				± 0.2	%FSR
f_{max}	Maximum conversion rate		20	30		MHz



TL5602 8-BIT DIGITAL-TO-ANALOG CONVERTER

SLAS020 – SEPTEMBER 1988 – REVISED OCTOBER 1990

PARAMETER MEASUREMENT INFORMATION

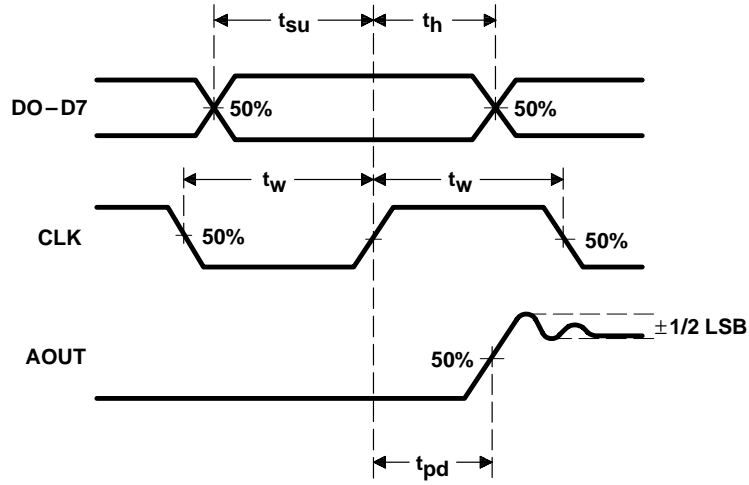


Figure 1. Voltage Waveforms

TYPICAL CHARACTERISTICS

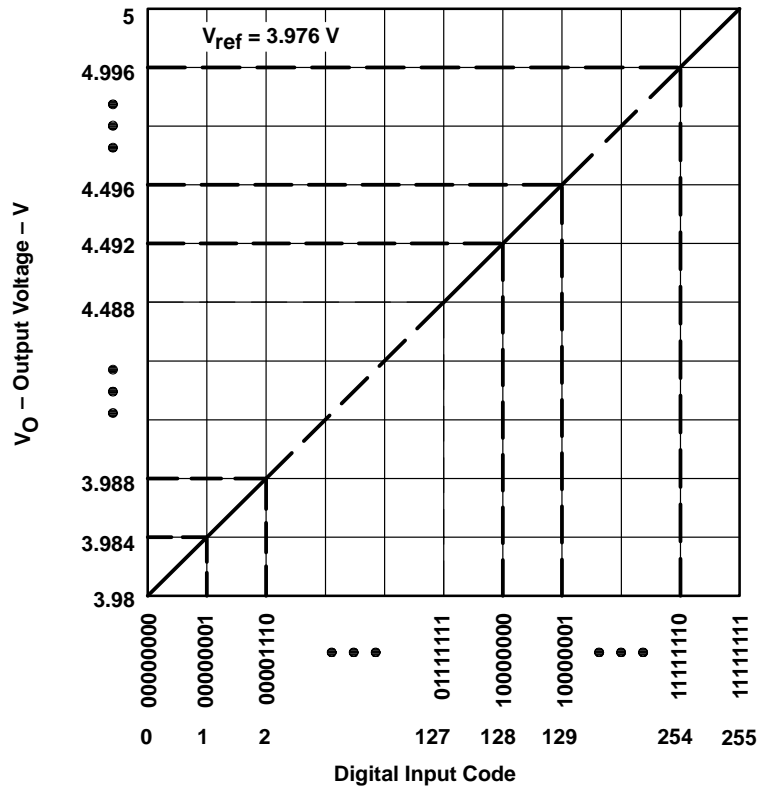


Figure 2. Ideal Conversion Characteristics



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265
POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443

TYPICAL CHARACTERISTICS

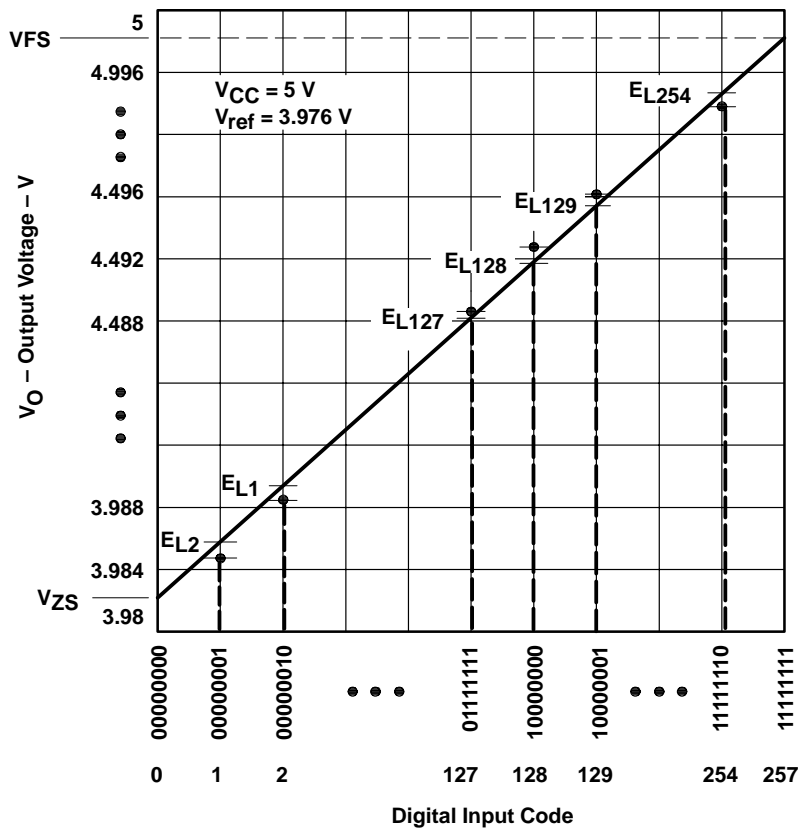


Figure 3. End-Point Linearity Error

IMPORTANT NOTICE

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.