SLIM DUAL IN-LINE PACKAGE
24 PIN CERAMIC

DIP-24C-A05

EIAJ code :∗DIP024-C-0400-1

24-pin ceramic SL-DIP

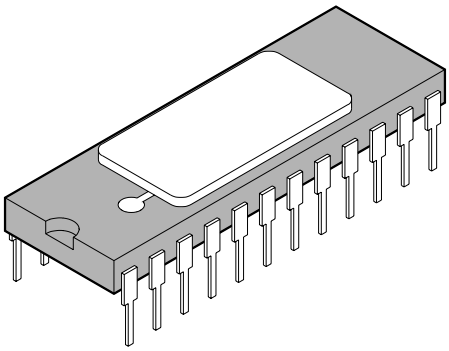

(DIP-24C-A05)

Lead pitch	100 mil
Row spacing	400 mil
Sealing method	Metal seal

24-pin ceramic SL-DIP
(DIP24C-A05)

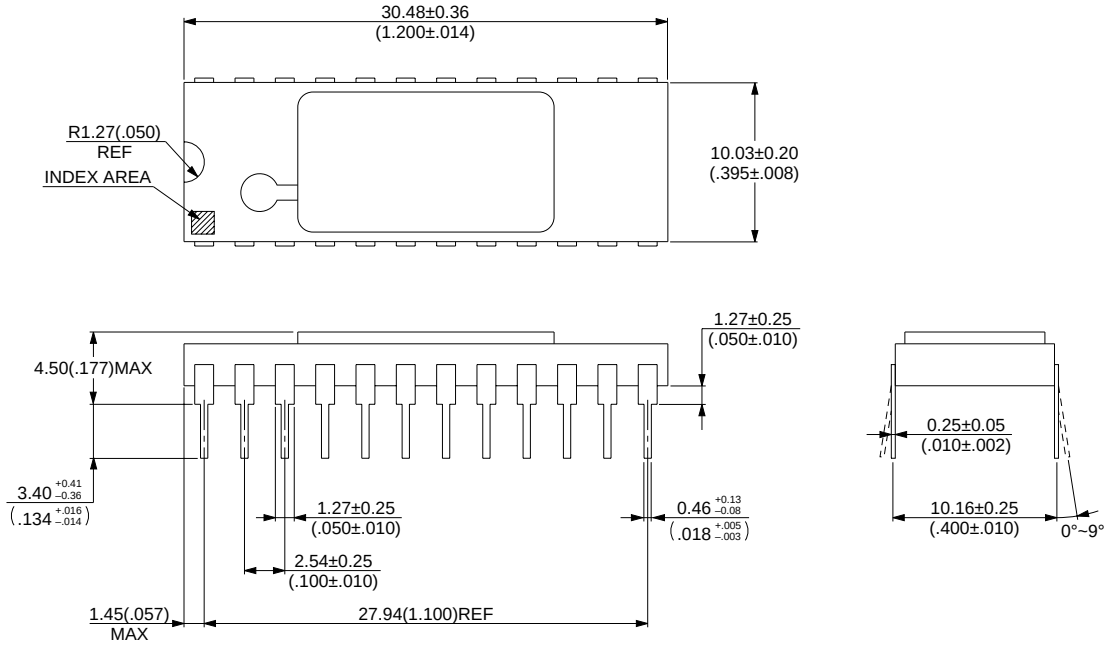

© 1994 FUJITSU LIMITED D24027SC-2-3

Dimensions in mm (inches).

The contents of this document are subject to change without notice.
Customers are advised to consult with FUJITSU sales representatives before ordering.
FUJITSU is unable to assume responsibility for infringement of any patent rights or other rights of third parties arising from the use of the information or package dimensions in this document.