SKINNY DUAL IN-LINE PACKAGE
24 PIN CERAMIC

DIP-24C-C04

EIAJ code :∗DIP024-G-0300-1

24-pin ceramic SK-DIP 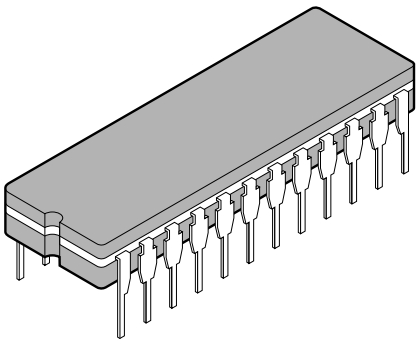 (DIP-24C-C04)	Lead pitch	100 mil
	Row spacing	400 mil
	Sealing method	Cerdip

24-pin ceramic SK-DIP
(DIP-24C-C04)

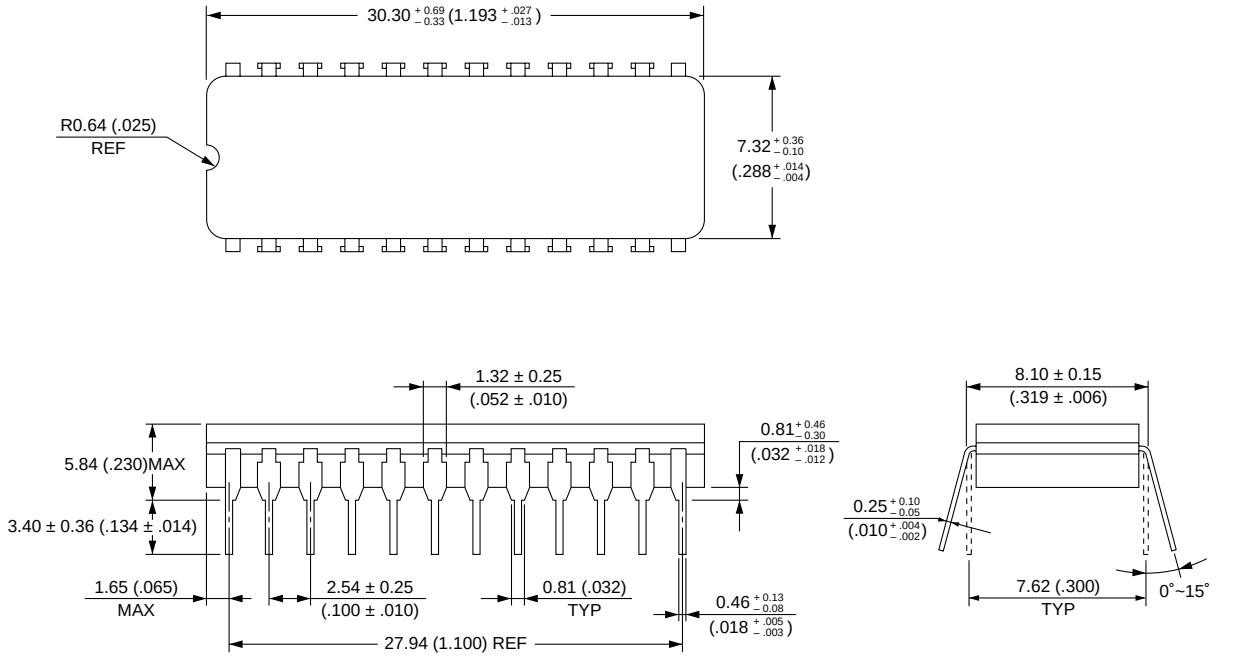

© 1994 FUJITSU LIMITED D24016SC-3-3

Dimensions in mm (inches).

The contents of this document are subject to change without notice.
Customers are advised to consult with FUJITSU sales representatives before ordering.
FUJITSU is unable to assume responsibility for infringement of any patent rights or other rights of third parties arising from the use of the information or package dimensions in this document.