
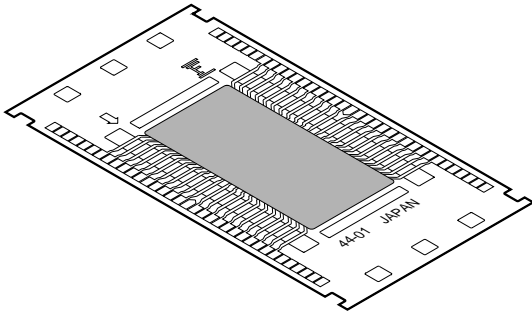


DTP-44A-M01

<p>14-pin ceramic DIP</p>  <p>(DTP-44A-M01)</p>	Lead pitch	0.80 mm
	Package width × package length	10.16 × 18.41 mm
	Sealing method	Resin seal

44-pin plastic DTP
(DTP-44A-M01)

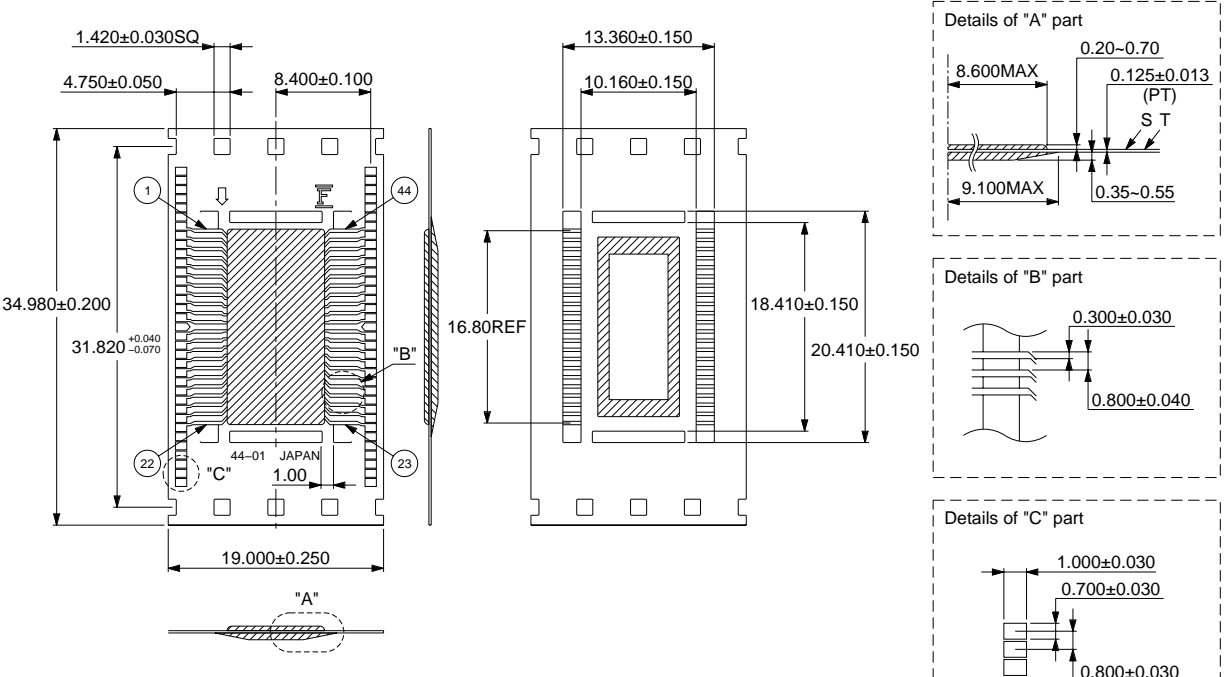

Technical drawing showing dimensions for the 44-pin plastic DTP package (DTP-44A-M01). Dimensions include:

- Top view: 1.420±0.030SQ, 4.750±0.050, 8.400±0.100, 13.360±0.150, 10.160±0.150, 34.980±0.200, 31.820^{+0.040}/_{-0.070}, 19.000±0.250, 16.80REF, 18.410±0.150, 20.410±0.150.
- Side view: 16.80REF, 18.410±0.150, 20.410±0.150.
- Details of "A" part: 8.600MAX, 0.20-0.70, 0.125±0.013 (PT), S, T, 9.100MAX, 0.35-0.55.
- Details of "B" part: 0.300±0.030, 0.800±0.040.
- Details of "C" part: 1.000±0.030, 0.700±0.030, 0.800±0.030.

Note 1. Part "T" indicates the lead (Cu); thickness:20 min.
Note 2. Part "S" indicates the adhesive; thickness:20±4 μm.

© 1997 FUJITSU LIMITED TC44001S-1-2

The contents of this document are subject to change without notice.
Customers are advised to consult with FUJITSU sales representatives before ordering.
FUJITSU is unable to assume responsibility for infringement of any patent rights or other rights of third parties arising from the use of the information or package dimensions in this document.