
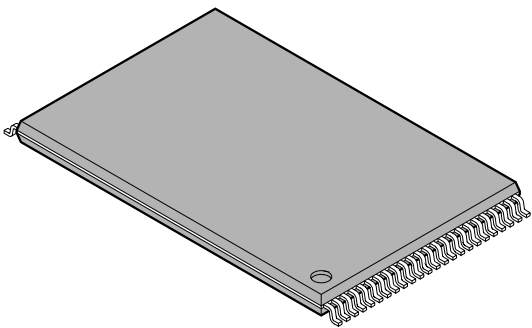


FPT-48P-M19

<p>48-pin plastic TSOP (I)</p>  <p>(FPT-48P-M19)</p>	Lead pitch	0.50 mm	
	Lead shape	Gullwing	
	Lead bend direction	Normal bend	
	Sealing method	Plastic mold	

48-pin plastic TSOP (I)
(FPT-48P-M19)

* : Resin protrusion. (Each side : 0.15 (.006) Max)

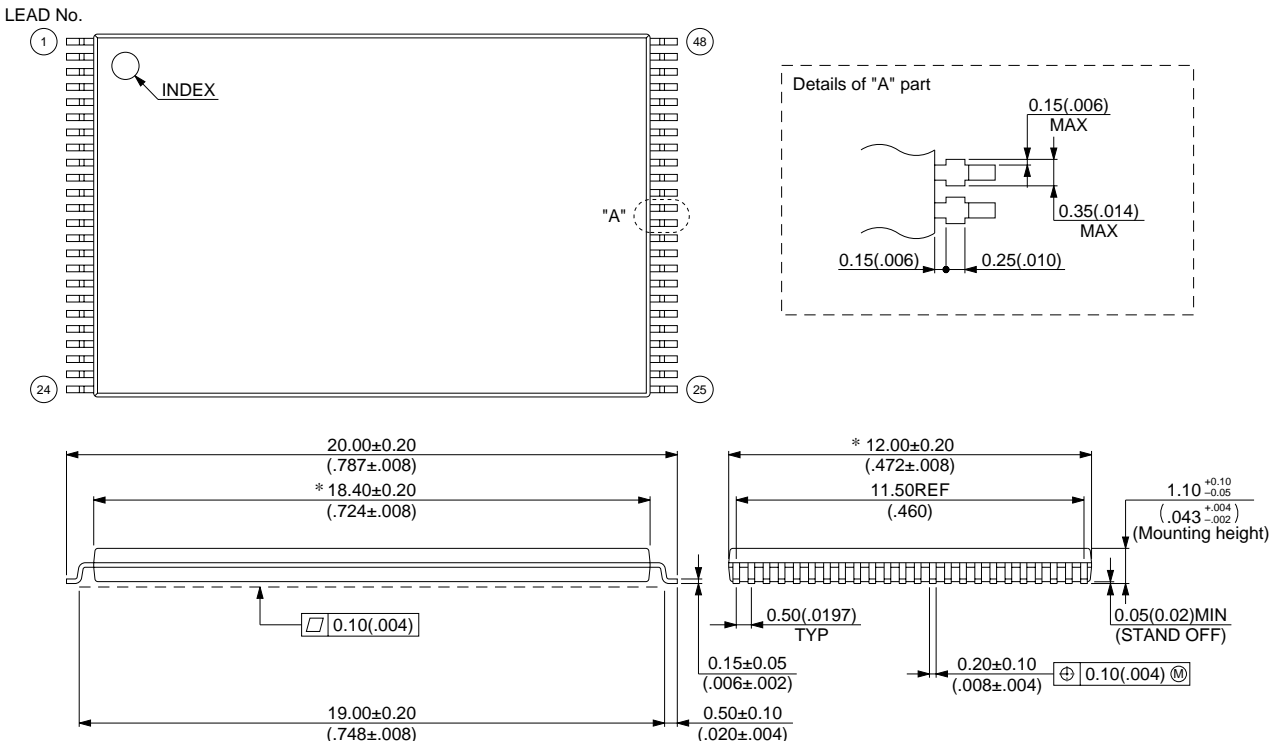

LEAD No. 1 24 25 48

INDEX

"A"

0.15(.006) MAX

0.35(.014) MAX

0.25(.010)

0.15(.006)

20.00±0.20 (.787±.008)

* 18.40±0.20 (.724±.008)

19.00±0.20 (.748±.008)

* 12.00±0.20 (.472±.008)

11.50 REF (.460)

1.10 (+0.10, -0.05) (.043 (+0.004, -0.002)) (Mounting height)

0.50±0.10 (.020±.004)

0.15±0.05 (.006±.002)

0.20±0.10 (.008±.004)

0.10±0.004 (.004)

0.50(.0197) TYP

0.05(0.02) MIN (STAND OFF)

⊕ 0.10(0.004) (M)

© 1996 FUJITSU LIMITED F48029S-2C-2

Dimensions in mm (inches).

The contents of this document are subject to change without notice.
Customers are advised to consult with FUJITSU sales representatives before ordering.
FUJITSU is unable to assume responsibility for infringement of any patent rights or other rights of third parties arising from the use of the information or package dimensions in this document.