

uA733C, uA733M DIFFERENTIAL VIDEO AMPLIFIERS

SLFS027A – NOVEMBER 1970 – REVISED MARCH 1993

- 200-MHz Bandwidth
- 250-k Ω Input Resistance
- Selectable Nominal Amplification of 10, 100, or 400
- No Frequency Compensation Required
- Designed to be Interchangeable With Fairchild uA733C and uA733M

description

The uA733 is a monolithic two-stage video amplifier with differential inputs and differential outputs.


Internal series-shunt feedback provides wide bandwidth, low phase distortion, and excellent gain stability. Emitter-follower outputs enable the device to drive capacitive loads, and all stages are current-source biased to obtain high common-mode and supply-voltage rejection ratios.

Fixed differential amplification of 10 V/V, 100 V/V, or 400 V/V may be selected without external components, or amplification may be adjusted from 10 V/V to 400 V/V by the use of a single external resistor connected between 1A and 1B. No external frequency-compensating components are required for any gain option.

The device is particularly useful in magnetic-tape or disc-file systems using phase or NRZ encoding and in high-speed thin-film or plated-wire memories. Other applications include general-purpose video and pulse amplifiers where wide bandwidth, low phase shift, and excellent gain stability are required.


The uA733C is characterized for operation from 0°C to 70°C; the uA733M is characterized for operation over the full military temperature range of –55°C to 125°C.

uA733C . . . D OR N PACKAGE
uA733M . . . J PACKAGE
(TOP VIEW)

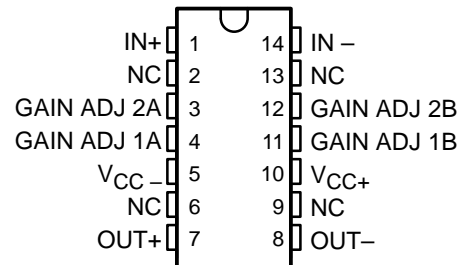


NC — No internal connection

uA733M . . . U PACKAGE
(TOP VIEW)

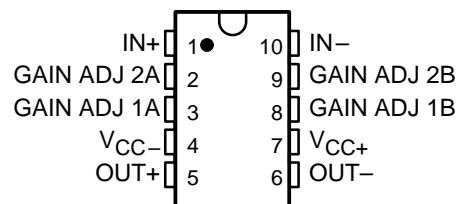


symbol

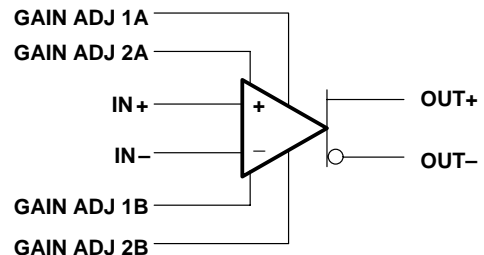

uA733C, uA733M DIFFERENTIAL VIDEO AMPLIFIERS

SLFS027A – NOVEMBER 1970 – REVISED MARCH 1993

schematic

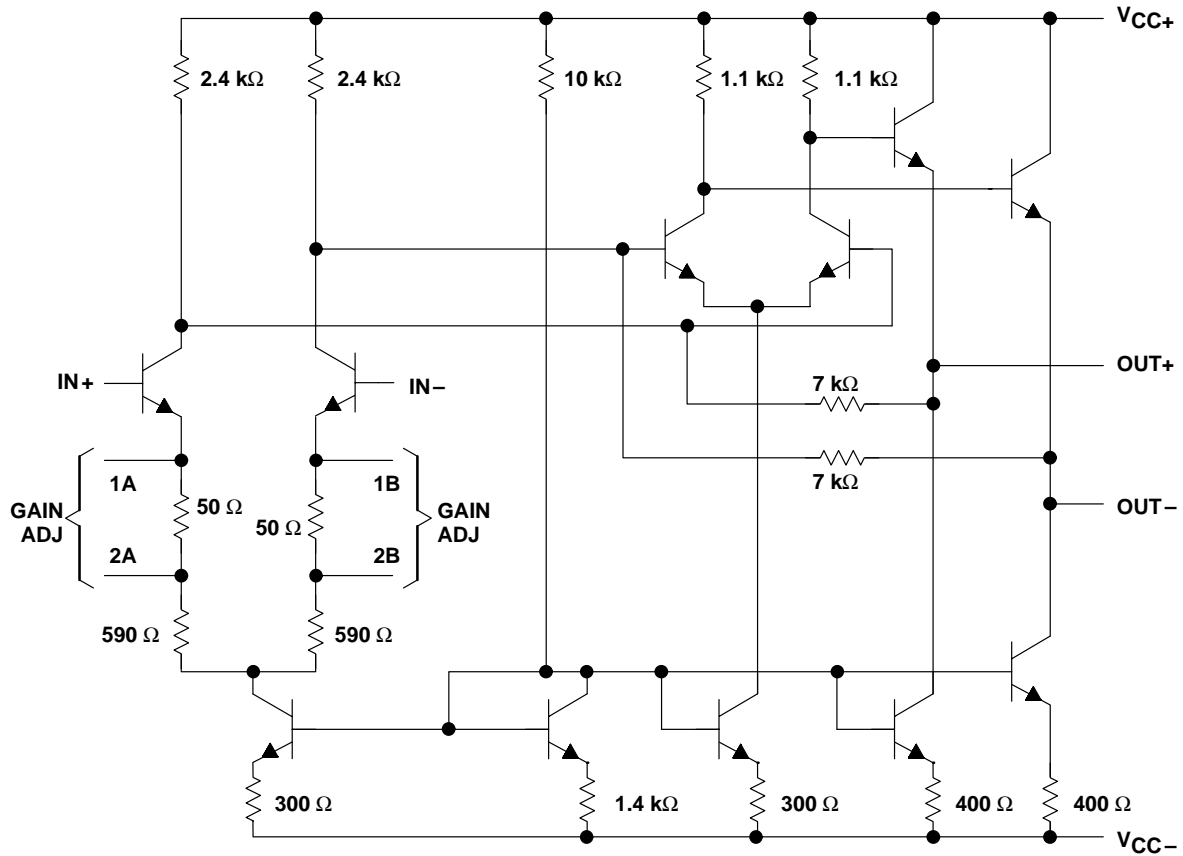

Component values shown are nominal.

Component values shown are nominal.

uA733C, uA733M DIFFERENTIAL VIDEO AMPLIFIERS

SLFS027A – NOVEMBER 1970 – REVISED MARCH 1993

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

	uA733C	uA733M	UNIT
Supply voltage V_{CC+} (see Note 1)	8	8	V
Supply voltage V_{CC-} (see Note 1)	-8	-8	V
Differential input voltage	± 5	± 5	V
Common-mode input voltage	± 6	± 6	V
Output current	10	10	mA
Continuous total power dissipation	See Dissipation Rating Table		
Operating free-air temperature range	0 to 70	-55 to 125	°C
Storage temperature range	-65 to 150	-65 to 150	°C
Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds	J or U package	300	°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	D or N package	260	°C

† Stresses beyond those listed under absolute maximum ratings may cause permanent damage to the device. This is a stress rating only, and functional operation of the device at these or any other conditions beyond those indicated in the recommended operating conditions section of this specification is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: All voltage values, except differential input voltages, are with respect to the midpoint between V_{CC+} and V_{CC-} .

DISSIPATION RATING TABLE

PACKAGE	$T_A \leq 25^\circ\text{C}$ POWER RATING	DERATING FACTOR	DERATE ABOVE T_A	$T_A = 70^\circ\text{C}$ POWER RATING	$T_A = 125^\circ\text{C}$ POWER RATING
D	500 mW	N/A	N/A	500 mW	N/A
J (uA733M)	500 mW	11.0 mW/°C	104°C	500 mW	269 mW
N	500 mW	N/A	N/A	500 mW	N/A
U	500 mW	5.4 mW/°C	57°C	430 mW	133 mW

uA733C, uA733M DIFFERENTIAL VIDEO AMPLIFIERS

SLFS027A – NOVEMBER 1970 – REVISED MARCH 1993

electrical characteristics, $V_{CC\pm} = \pm 6\text{ V}$, $T_A = 25^\circ\text{C}$

PARAMETER	FIGURE	TEST CONDITIONS	GAIN OPTION†	uA733C			uA733M			UNIT
				MIN	TYP	MAX	MIN	TYP	MAX	
AVD Large-signal differential voltage amplification	1	$V_{OD} = 1\text{ V}$	1	250	400	600	300	400	500	V/V
			2	80	100	120	90	100	110	
			3	8	10	12	9	10	11	
BW Bandwidth	2	$R_S = 50\ \Omega$	1	50			50			MHz
			2	90			90			
			3	200			200			
I_{IO} Input offset current			Any	0.4	5	0.4	3	μA		
I_{IB} Input bias current			Any	9	30	9	20	μA		
V_{ICR} Common-mode input voltage range	1		Any	± 1			± 1			V
V_{OC} Common-mode output voltage	1		Any	2.4	2.9	3.4	2.4	2.9	3.4	V
V_{OO} Output offset voltage	1		1	0.6	1.5	0.6	1.5			V
			2 & 3	0.35	1.5	0.35	1			
V_{OPP} Maximum peak-to-peak output voltage swing	1		Any	3	4.7	3	4.7		V	
r_i Input resistance	3	$V_{OD} \leq 1\text{ V}$	1	4			4			k Ω
			2	10	24	20	24			
			3	250			250			
r_o Output resistance				20			20			Ω
C_i Input capacitance	3	$V_{OD} \leq 1\text{ V}$	2	2			2			pF
CMRR Common-mode rejection ration	4	$V_{IC} = \pm 1\text{ V}$, $f \leq 100\text{ kHz}$	2	60	86	60	86			dB
		$V_{IC} = \pm 1\text{ V}$, $f = 5\text{ MHz}$	2	70			70			
k_{SVR} Supply voltage rejection ratio ($\Delta V_{CC}/\Delta V_{IO}$)	1	$\Delta V_{CC\pm} = \pm 0.5\text{ V}$	2	50	70	50	70			dB
V_n Broadband equivalent input noise voltage	5	$BW = 1\text{ kHz to } 10\text{ MHz}$	Any	12			12			μV
t_{pd} Propagation delay time	2	$R_S = 50\ \Omega$, Output voltage step = 1 V	1	7.5			7.5			ns
			2	6.0	10	6.0	10			
			3	3.6			3.6			
t_r Rise time	2	$R_S = 50\ \Omega$, Output voltage step = 1 V	1	10.5			10.5			ns
			2	4.5	12	4.5	10			
			3	2.5			2.5			
$I_{sink(max)}$ Maximum output sink current			Any	2.5	3.6	2.5	3.6		mA	
I_{CC} Supply current		No load, No signal	Any	16	24	16	24		mA	

† The gain option is selected as follows:

Gain Option 1 . . . Gain-adjust pin 1A is connected to pin 1B, and pins 2A and 2B are open.

Gain Option 2 . . . Gain-adjust pin 1A and pin 1B are open, pin 2A is connected to pin 2B.

Gain Option 3 . . . All four gain-adjust pins are open.



uA733C, uA733M DIFFERENTIAL VIDEO AMPLIFIERS

SLFS027A – NOVEMBER 1970 – REVISED MARCH 1993

electrical characteristics, $V_{CC\pm} = \pm 6\text{ V}$, $T_A = 0^\circ\text{C}$ to 70°C for uA733C, -55°C to 125°C for uA733M

PARAMETER	FIGURE	TEST CONDITIONS	GAIN OPTION†	uA733C		uA733M		UNIT	
				MIN	MAX	MIN	MAX		
A_{VD}	Large-signal differential voltage amplification	1	$V_{OD} = 1\text{ V}$	1	250	600	200	600	V/V
				2	80	120	80	120	
				3	8	12	8	12	
I_{IO}	Input offset current			Any		6		5	μA
I_{IB}	Input bias current			Any		40		40	μA
V_{ICR}	Common-mode input voltage range	1		Any	± 1		± 1		V
V_{OO}	Output offset voltage	1		1		1.5		1.5	V
				2 & 3		1.5		1.2	
V_{OPP}	Maximum peak-to-peak output voltage swing	1		Any	2.8		2.5		V
r_i	Input resistance	3	$V_{OD} \leq 1\text{ V}$	2	8		8		$\text{k}\Omega$
CMRR	Common-mode rejection ratio	4	$V_{IC} = +1\text{ V}$, $f \leq 100\text{ kHz}$	2	50		50		dB
k_{SVR}	Supply voltage rejection ratio ($\Delta V_{CC}/\Delta V_{IO}$)	1	$\Delta V_{CC\pm} = \pm 0.5\text{ V}$	2	50		50		dB
$I_{\text{sink(max)}}$	Maximum output sink current			Any	2.5		2.2		mA
I_{CC}	Supply current		No load, No signal	Any		27		27	mA

† The gain option is selected as follows:

Gain Option 1 . . . Gain-adjust pin 1A is connected to pin 1B, and pins 2A and 2B are open.

Gain Option 2 . . . Gain-adjust pin 1A and pin 1B are open, pin 2A is connected to pin 2B.

Gain Option 3 . . . All four gain-adjust pins are open.

uA733C, uA733M DIFFERENTIAL VIDEO AMPLIFIERS

SLFS027A – NOVEMBER 1970 – REVISED MARCH 1993

PARAMETER MEASUREMENT INFORMATION

test circuits

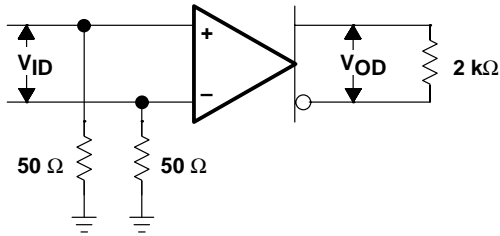


Figure 1

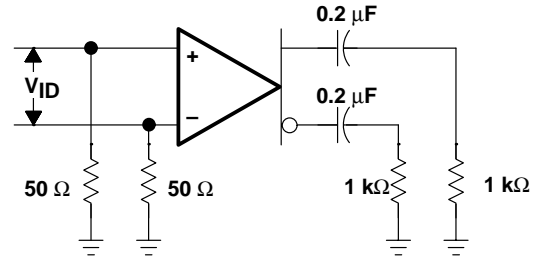


Figure 2

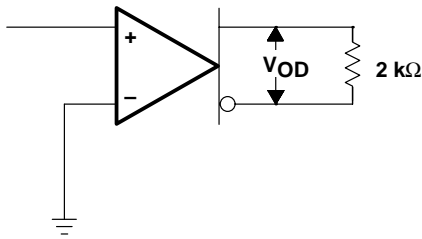


Figure 3

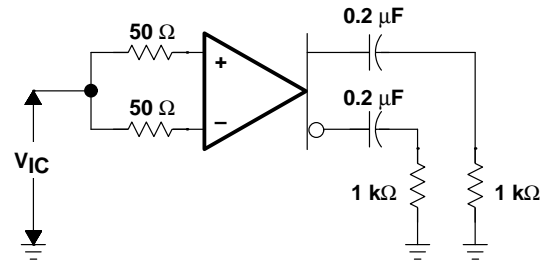


Figure 4


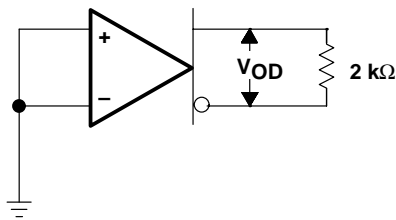


Figure 5

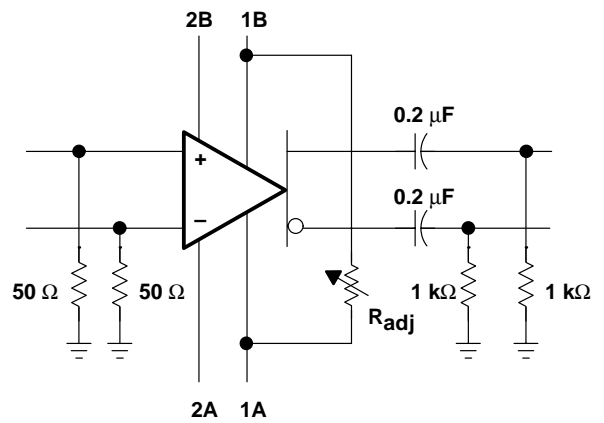

VOLTAGE AMPLIFICATION ADJUSTMENT

Figure 6

TYPICAL CHARACTERISTICS

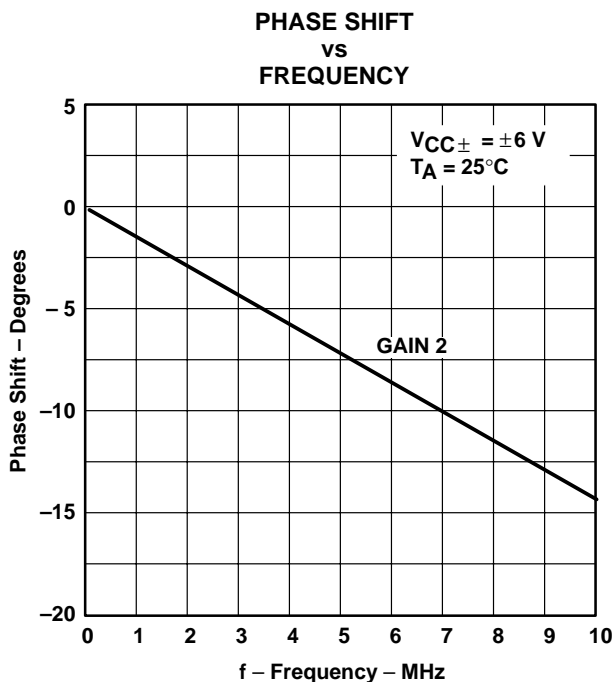


Figure 7

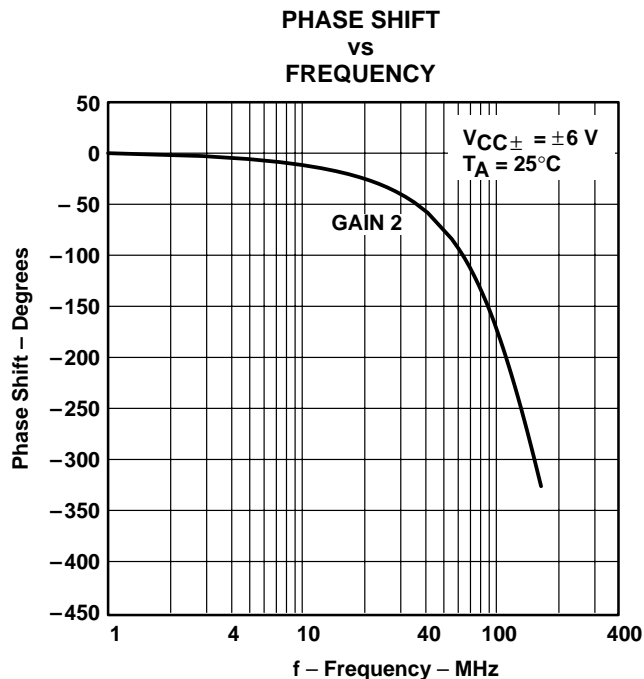


Figure 8

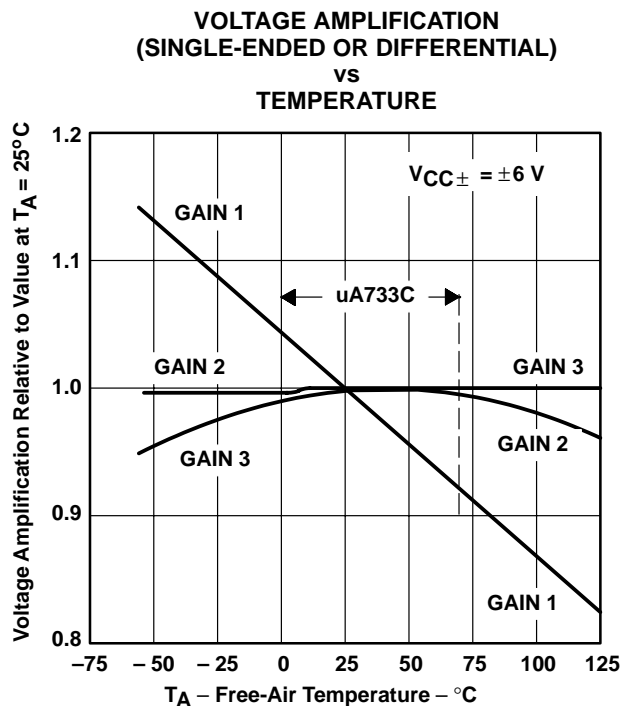


Figure 9

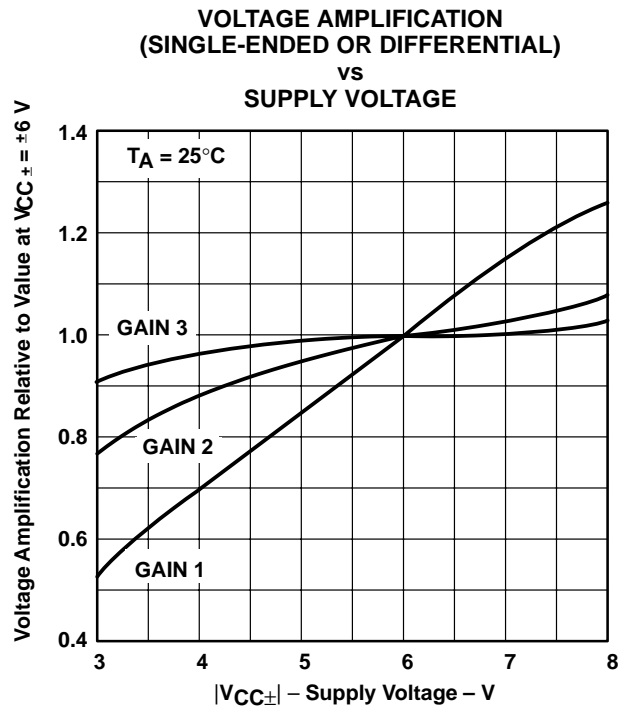


Figure 10

uA733C, uA733M DIFFERENTIAL VIDEO AMPLIFIERS

SLFS027A – NOVEMBER 1970 – REVISED MARCH 1993

TYPICAL CHARACTERISTICS

**DIFFERENTIAL VOLTAGE AMPLIFICATION
vs
RESISTANCE BETWEEN G1A AND G1B**

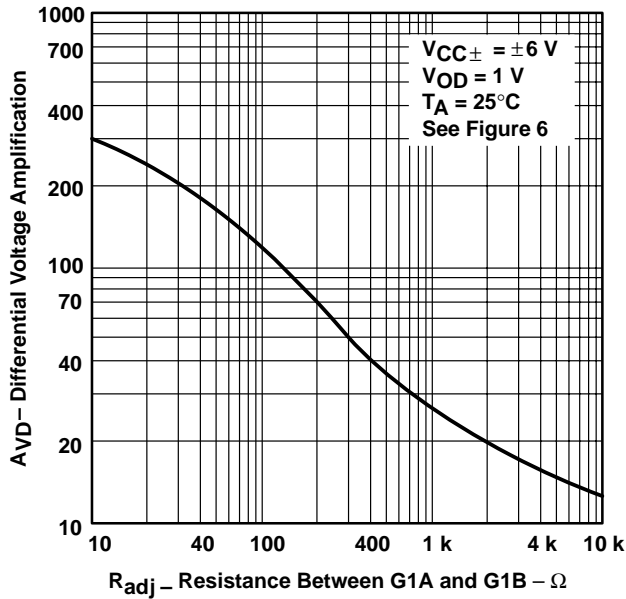


Figure 11

**SINGLE-ENDED VOLTAGE AMPLIFICATION
vs
FREQUENCY**

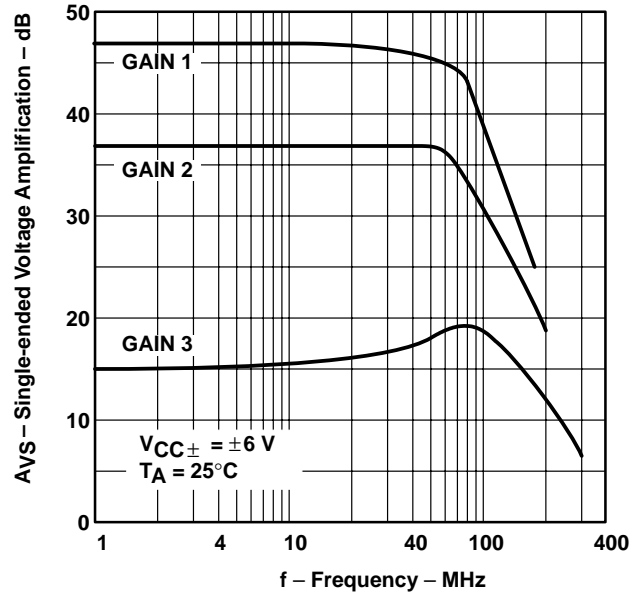


Figure 12

**SUPPLY CURRENT
vs
FREE-AIR TEMPERATURE**

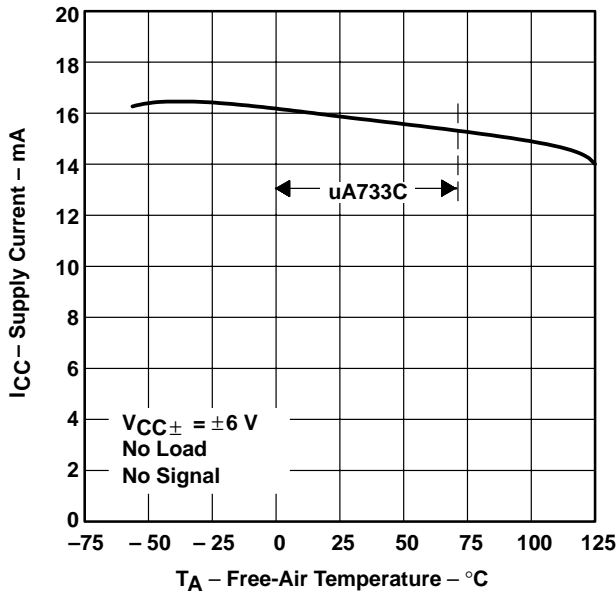


Figure 13

**SUPPLY CURRENT
vs
SUPPLY VOLTAGE**

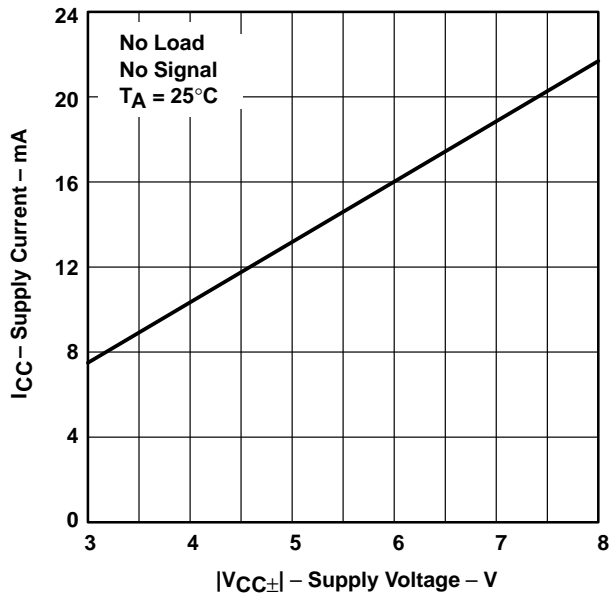


Figure 14

TYPICAL CHARACTERISTICS

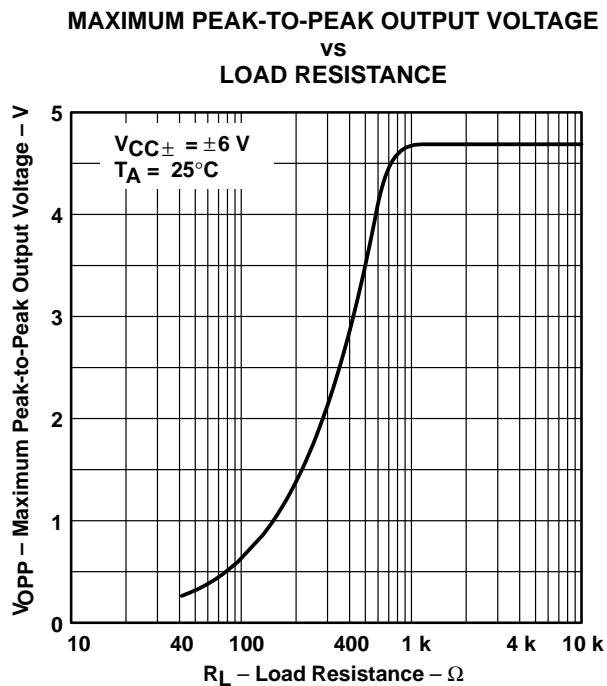


Figure 15

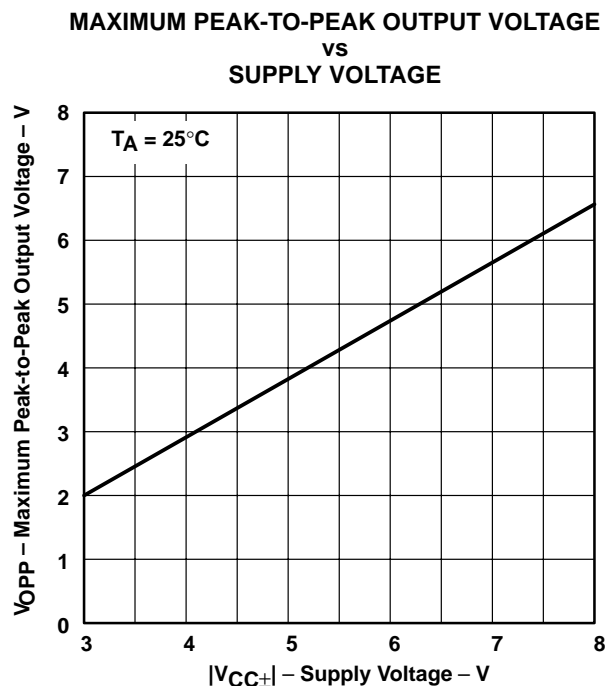


Figure 16

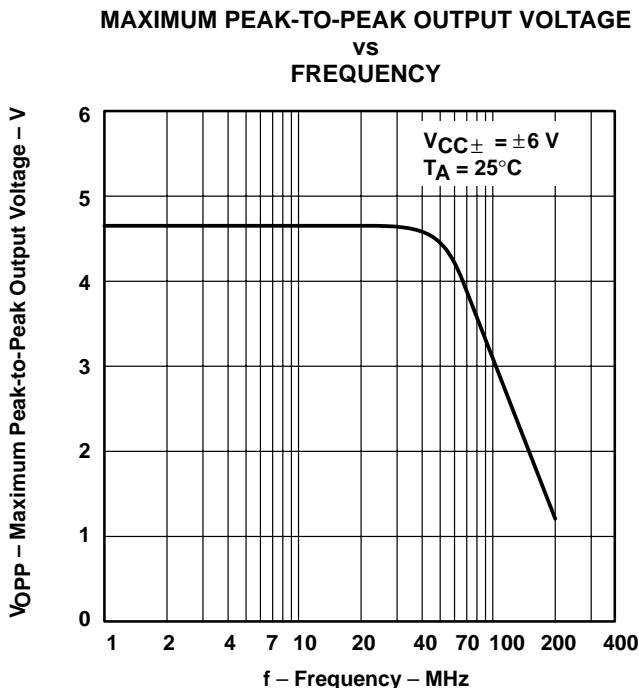


Figure 17

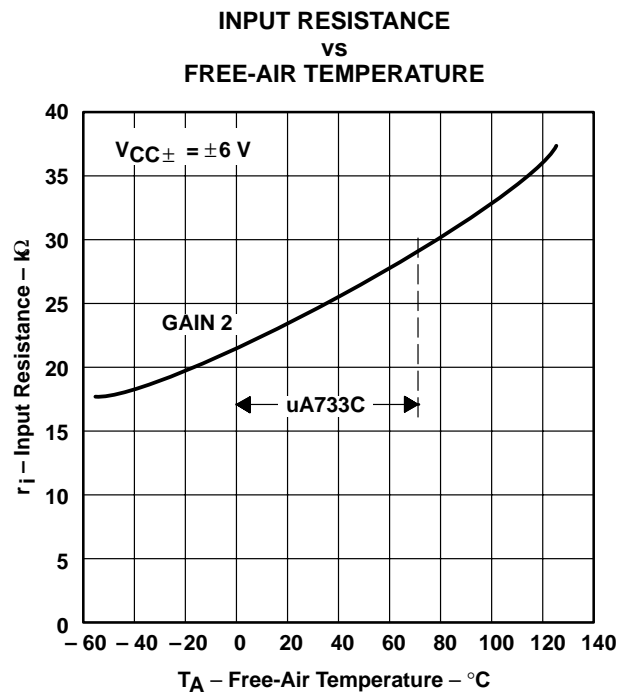


Figure 18

IMPORTANT NOTICE

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.