


DM74S132

Quad 2-Input Schmitt Trigger NAND Gate

General Description

This device contains four independent gates that perform the logic NAND function. Each gate has two inputs that are Schmitt Triggers.

Connection Diagram

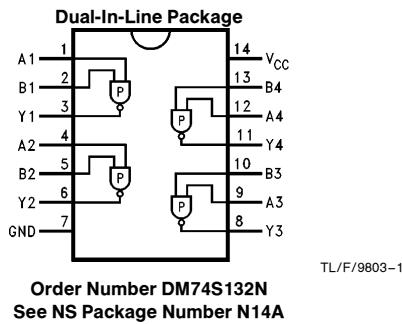

Function Table

$$Y = \overline{AB}$$

| Inputs | | Output |
|--------|---|--------|
| A | B | Y |
| L | L | H |
| L | H | H |
| H | L | H |
| H | H | L |

H = High Logic Level
L = Low Logic Level

Absolute Maximum Ratings (Note)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

| | |
|---|------------------|
| Supply Voltage | 7V |
| Input Voltage | 5.5V |
| Operating Free Air Temperature Range DM74S | 0°C to + 70°C |
| Storage Temperature Range | -65°C to + 150°C |

Note: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Recommended Operating Conditions

| Symbol | Parameter | DM74S132 | | | Units |
|------------------------|---|----------|--------|------|-------|
| | | Min | Nom | Max | |
| V _{CC} | Supply Voltage | 4.75 | 5 | 5.25 | V |
| V _{IH} | High Level Input Voltage | 2 | | | V |
| V _{IL} | Low Level Input Voltage | | | 0.8 | V |
| I _{OH} | High Level Output Current | | | -1 | mA |
| I _{OL} | Low Level Output Current | | | 20 | mA |
| T _A | Free Air Operating Temperature | 0 | | 70 | °C |
| V _{T+} | Positive-Going Threshold Voltage | 1.6 | | 1.9 | V |
| V _{T-} | Negative-Going Threshold Voltage | 1.1 | | 1.4 | V |
| V _{T+ - V_T-} | Hysteresis Voltage | 0.2 | | | V |
| I _{T+} | Input Current at Positive-Going Threshold | | -0.9** | | mA |
| I _{T-} | Input Current at Negative-Going Threshold | | -1.1** | | mA |

*DC limits apply over operating temperature range; AC limits apply at T_A = +25°C and V_{CC} = +5.0V. **Typical Value.

Electrical Characteristics

 Over recommended operating free air temperature range (unless otherwise noted)

| Symbol | Parameter | Conditions | Min | Typ (Note 1) | Max | Units |
|------------------|-----------------------------------|---|-----|--------------|------|-------|
| V _I | Input Clamp Voltage | V _{CC} = Min, I _I = -18 mA | | | -1.2 | V |
| V _{OH} | High Level Output Voltage | V _{CC} = Min, I _{OH} = Max V _{IL} = Max | 2.7 | 3.4 | | V |
| V _{OL} | Low Level Output Voltage | V _{CC} = Min, I _{OL} = Max V _{IH} = Min | | 0.35 | 0.5 | V |
| I _I | Input Current @ Max Input Voltage | V _{CC} = Max, V _I = 5.5V | | | 1 | mA |
| I _{IH} | High Level Input Current | V _{CC} = Max, V _I = 2.7V | | | 50 | μA |
| I _{IL} | Low Level Input Current | V _{CC} = Max, V _I = 0.5V | | | -2.0 | mA |
| I _{OS} | Short Circuit Output Current | V _{CC} = Max (Note 2) | -40 | | -100 | mA |
| I _{CCH} | Supply Current with Outputs High | V _{CC} = Max | | | 44 | mA |
| I _{CCL} | Supply Current with Outputs Low | V _{CC} = Max | | | 68 | mA |

Note 1: All typicals are at V_{CC} = 5V, T_A = 25°C.


Note 2: Not more than one output should be shorted at a time, and the duration should not exceed one second.

Switching Characteristics $V_{CC} = 5V$ and $T_A = 25^\circ C$ (See Section 1 for Test Waveforms and Output Load)

| Symbol | Parameter | $R_L = 280\Omega$ | | Units | |
|-----------|--|-----------------------|------|-------|--|
| | | $C_L = 15 \text{ pF}$ | | | |
| | | Min | Max | | |
| t_{PLH} | Propagation Delay Time Low to High Level Output | | 10.5 | ns | |
| t_{PHL} | Propagation Delay Time High to Low Level Output | | 13 | ns | |

DM74S132 Quad 2-Input Schmitt Trigger NAND Gate

Physical Dimensions inches (millimeters)

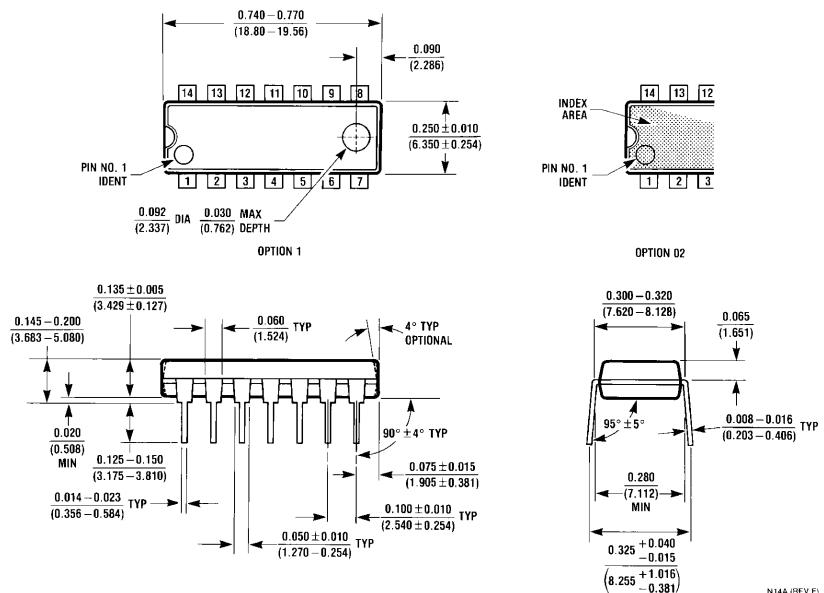

14-Lead Molded Dual-In-Line Package (N)
Order Number DM74S132N
NS Package Number N14A

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor
Corporation**
1111 West Bardin Road
Arlington, TX 76017
Tel: 1(800) 272-9959
Fax: 1(800) 737-7018

**National Semiconductor
Europe**
Fax: (+49) 0-180-530 85 86
Email: cnjwge@tevm2.nsc.com
Deutsch Tel: (+49) 0-180-530 85 85
English Tel: (+49) 0-180-532 78 32
Français Tel: (+49) 0-180-532 93 58
Italiano Tel: (+49) 0-180-534 16 80

**National Semiconductor
Hong Kong Ltd.**
13th Floor, Straight Block,
Ocean Centre, 5 Canton Rd.
Tsimshatsui, Kowloon
Hong Kong
Tel: (852) 2737-1600
Fax: (852) 2736-9960

**National Semiconductor
Japan Ltd.**
Tel: 81-043-299-2309
Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.